

Soft Close for Single Run 120 (for doors up to 100kg) Installation Instructions


Components

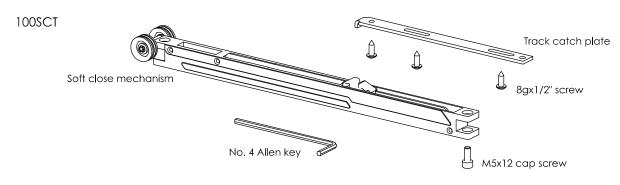


Applications HC = hanger centre distance from panel end

2.5-5 [1/8" - 3/16"]

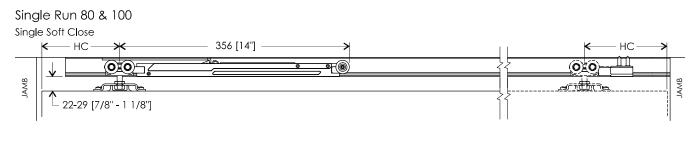




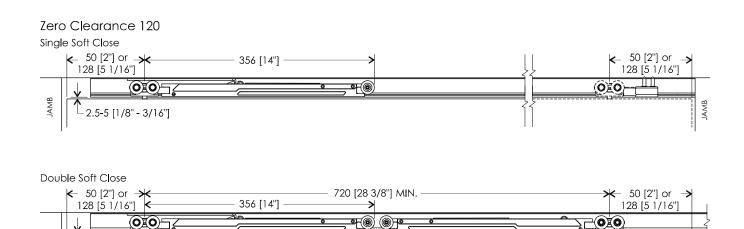


Installation Single soft close application shown


Fix catch plate into track through slotted holes with 2 screws only

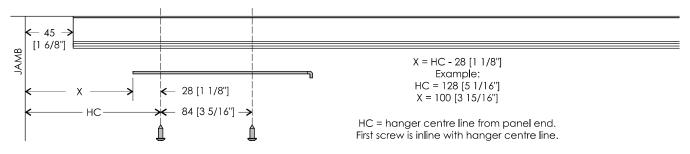


Insert clip stop &1st hanger into track, then soft close. The soft close must be in primed position, as shown

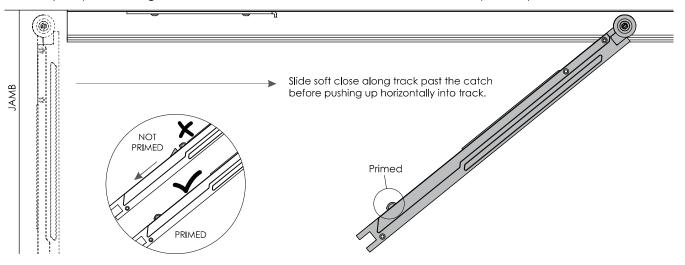


Insert 2nd hanger & attach to soft close with cap screw. Install panel as per system instructions.

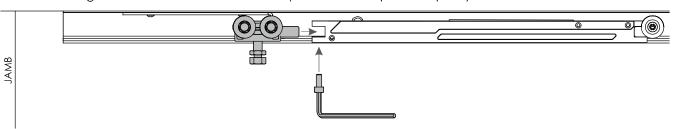

Fine adjustment

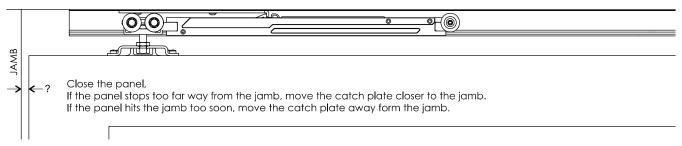


Adjust catch plate as required. Secure in final position with the 3rd screw

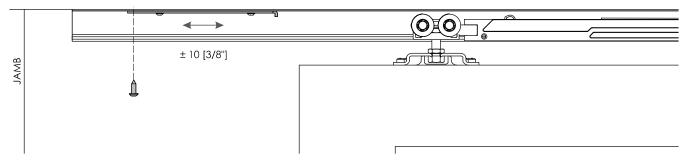

Care and Maintenance

Product

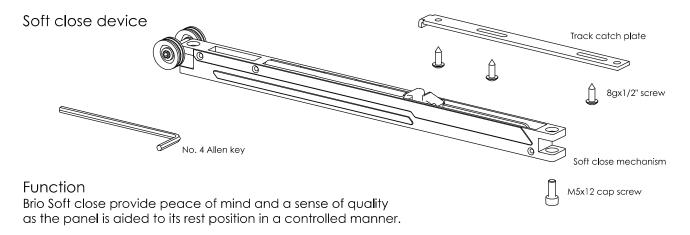


Maintenance

Care


To ensure the product provides years of trouble free service a little maintenance maybe required.

Periodically wipe down the rails of the track to remove unwanted build up of dust and dirt that may prevent the wheels rotating smoothly.



Adjustment

Over time there maybe a need to adjust the rest position of the soft close device.

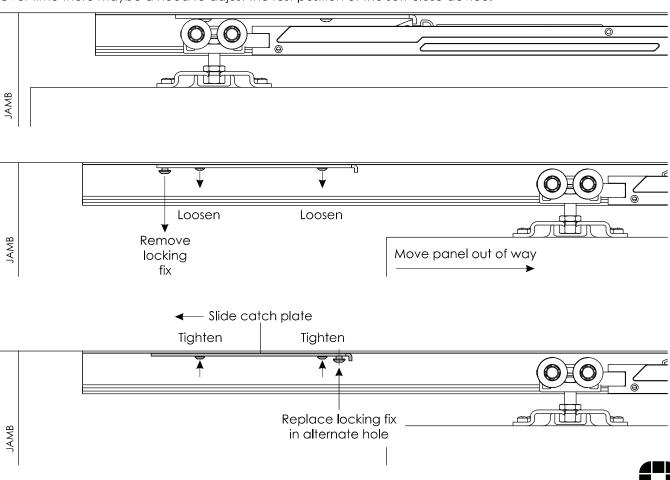

0330 8080 617 briouk.com brio.sales.uk@allegion.com